

PDT-001327


Range name	TOP FIX
Finish	Brushed Brass
Barcode	5056634510755
Category:	Kitchens
Sub Category:	Brassware
Sub Category 2:	Kitchen Tap



1. True Top-Fix Installation – Fit the tap from above the sink without the need to work in cramped spaces underneath.
2. No Awkward Under-Sink Fixings – You only need to go under the sink to connect the flexi tails to your plumbing—no more struggling with nuts and bolts in tight spaces.
3. Professional Finish – Once installed, the fixing hole is neatly concealed with the included cover cap for a seamless look.
4. Pre-Installed Flexible Hoses – Supplied with pre-fitted flexi hoses for even faster and more straightforward connection to your water supply.
5. Timesaving for Professionals & DIY Users – Reduces installation time and effort, making it ideal for both pl

Related Standard(s):	EN 817:2008
----------------------	-------------

DOC ref:	DOC-KT-1003A
WRAS Approved:	No
WRAS No1:	n/a
KUKreg4 Approved:	Yes
No 1:	Pending

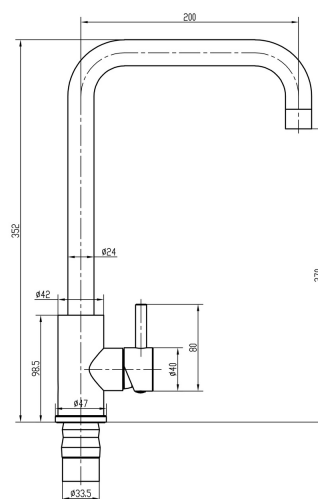

FLOW RATE (Mixed Hot and Cold Flow)

Pressure	0.2Bar	0.5Bar	1Bar	2Bar	3Bar
Litres per Minute	n/a	3.4	5	7.3	9.1

Product Weight (KG)	1.100
Single Box Length (mm)	490
Single Box Width (mm)	240
Single Box Height (mm)	70
Single Item box Weight (KG)	1.500
Outer Carton Length (mm)	500
Outer Carton Width (mm)	460
Outer Carton Height (mm)	325
Outer Carton Net Weight (kg)	11
Outer Carton Gross Weight (kg)	15
Single Item(s) Per Outer Carton	10

Aerator	Flow Straightener
Control Type	Single Lever Control
Flow Type	Single Flow
Hose Supplied	Supplied with Flexible Tap Tails
Connection Type	G ½" Connection
Mount Type	Deck-Mounted
Spout Reach	200 mm
Spout Type	Swivel Spout
Tap Style	Modern
Tap Handle Type (Kitchens)	Single Lever
Tap Operation Type	¼ Turn
Valve Type	35mm Ceramic Cartridge
Gravity Fed Systems	Not Suitable for Gravity-Fed Systems
Maximum Bar Pressure	3 bar
Minimum Bar Pressure	1 bar



hello@top-fix.co.uk



01724 847397



Ninth Avenue, Flixborough Ind Est,
Scunthorpe, North Lincolnshire, DN15 8SL